

- ① **KS 130 basic**
EUR 1.653,00
Ident. No. 0002980000
- ② **KS 130 control**
EUR 2.424,00
Ident. No. 0002980100
- ③ **KS 130 control NOL**
EUR 2.424,00
Ident. No. 0004278200



- ① **KS 260 basic**
EUR 2.644,00
Ident. No. 0002980200
- ② **KS 260 control**
EUR 3.306,00
Ident. No. 0002980300
- ③ **KS 260 control NOL**
EUR 3.306,00
Ident. No. 0004278400




TECHNICAL DATA	KS 130 BASIC CONTROL	KS 260 BASIC CONTROL
Type of movement	Orbital	Orbital
Shaker diameter	4 mm	10 mm
Permissible shaking weight (incl. attachment)	2,0 kg	7,5 kg
Speed range	80 – 800 rpm	50 – 500 rpm 10 – 500 rpm
Timer display	LED line LCD	LED line LCD
Speed display	LED line LCD	LED line LCD
Operating mode	Timer and continuous operation	Timer and continuous operation
Dimensions (W x H x D)	270 x 98 x 316 mm	360 x 98 x 420 mm
Protection class according to DIN EN 60529	IP 21	IP 21

- ① **HS 260 basic**
EUR 2.644,00
Ident. No. 0003066600
- ② **HS 260 control**
EUR 3.306,00
Ident. No. 0003066700
- ③ **HS 260 control NOL**
EUR 3.306,00
Ident. No. 0004278600



- ① **HS 501 digital**
EUR 4.904,00
Ident. No. 0025002982
- ② **KS 501 digital**
EUR 4.904,00
Ident. No. 0025002985

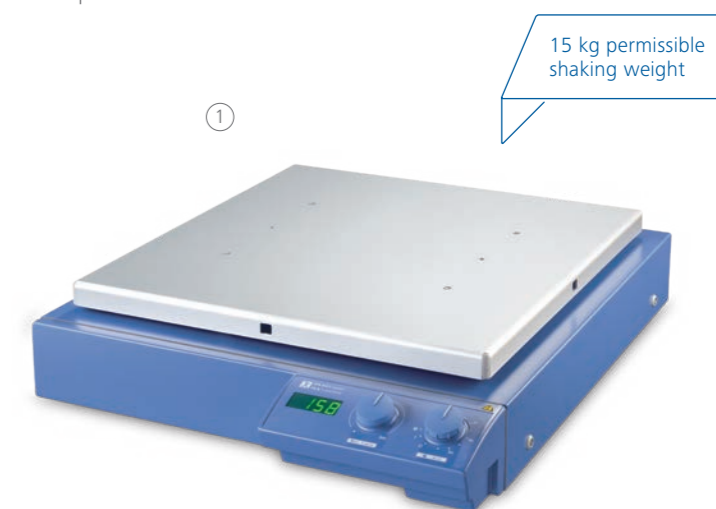

TECHNICAL DATA	HS 260 BASIC CONTROL	HS 501 DIGITAL KS 501 DIGITAL
Type of movement	Reciprocating	Reciprocating Orbital
Shaker diameter	20 mm	30 mm
Permissible shaking weight (incl. attachment)	7,5 kg	15 kg
Speed range	20 – 300 rpm 10 – 300 rpm	0 – 300 rpm
Timer display	LED line LCD	Scale
Speed display	LED line LCD	7 segment LED
Operating mode	Timer and continuous operation	Timer and continuous operation
Dimensions (W x H x D)	360 x 100 x 420 mm	505 x 120 x 585 mm
Protection class according to DIN EN 60529	IP 21	IP 21