




MVE Cryopreservation Equipment

Storage and Transport Systems for Biological Materials



Table of Contents

Temperature Chart & Product Selector Guide.....	3
MVE 800 Series -190°C High Efficiency Freezer	4
MVE 1500 Series -190°C High Efficiency Freezer	6
MVE 1800 Series -190°C High Efficiency Freezer	8
MVE Variō Series.....	10
MVE Series.....	12
MVE Stock Series	14
MVE Cabinet Series.....	16
MVE Cryo Cart	18
MVE TEC 3000	19
MVE CryoSystem Series.....	20
MVE SC Series.....	22
MVE XC Series	24
MVE Lab Series	26
MVE CryoShipper QWick™ & Vapor Series	28
MVE Doble QWick™ & Doble Series.....	30
MVE CryoCube.....	32
LN2 Tx.....	33
Accessories	34
Inventory.....	35

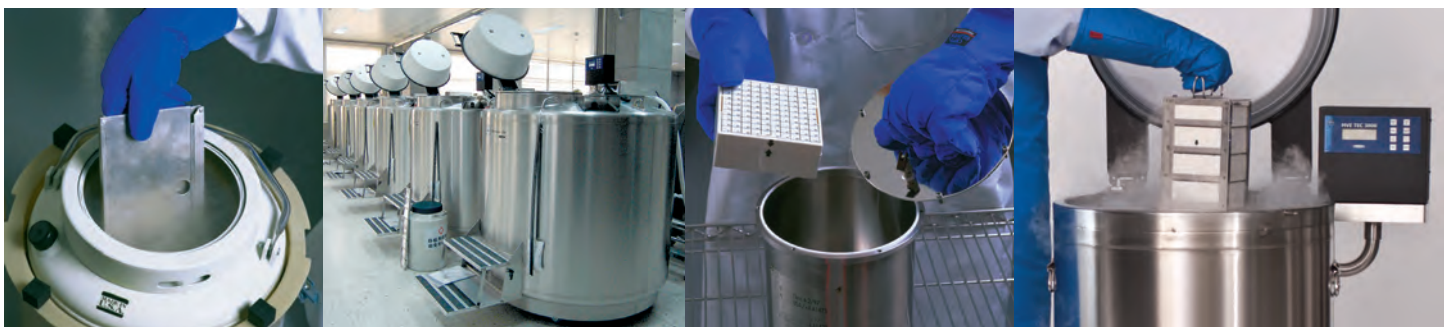


Temperature Chart & Product Selector Guide

Chart MVE is the world's leading manufacturer of vacuum insulated products and cryogenic systems. More than forty years ago, we set the standard for storage of biological materials at low temperatures. Today, we continue to exceed these standards. Industries from around the world look to Chart MVE for excellence and innovation. Our solutions empower industries to better utilize cryogenic technology. In this manner, Chart MVE continues to make a vital contribution in today's biomedical industry.

Recommended maximum temperature for storage of biological samples

MATERIAL TO BE STORED	VOLUME	CONTAINER	INVENTORY CONFIGURATION	CRITICAL TEMPERATURE
Algae	0.5 - 1.0 mL	Cryovial	Boxes or canes	-150°C
Blood	0.5 - 500 mL	Cryovial/Blood Bag	Boxes or canes/bag rack	-150°C
Cells:				
Animals / Human	0.5 - 1.0 mL	Cryovial	Boxes or canes	-150°C
Plant	0.5 - 1.0 mL	Cryovial	Boxes or canes	-150°C
Embryos		Straw	Canes	-150°C
Fungi:				
Mycelium	0.5 - 1.0 mL	Cryovial	Boxes or canes	-150°C
Hybridomas	0.5 - 1.0 mL	Cryovial	Boxes or canes	-150°C
Phage:				
Libraries	0.5 - 1.0 mL	Cryovial	Boxes or canes	-150°C
Protozoa	0.5 - 1.0 mL	Cryovial	Boxes or canes	-150°C
Viruses: Animal				
In Cells	0.5 - 1.0 mL	Cryovial	Boxes or canes	-150°C

Product Selector Guide

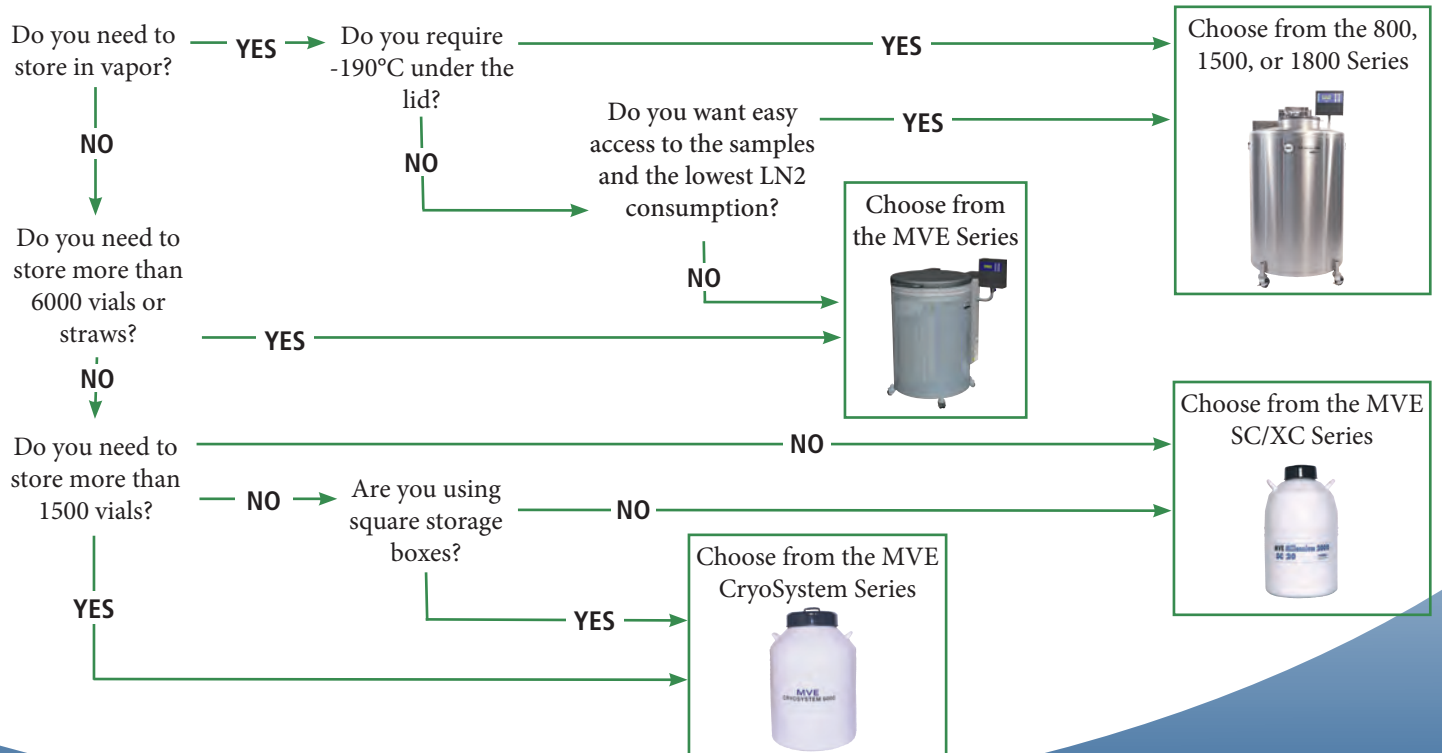

MVE 800 Series -190°C High Efficiency Freezer

The MVE 800 Series -190°C freezers provide stable cryogenic storage for up to 19,500 1.2 / 2.0 ml vials. These freezers provide maximum storage density and provide the industry's longest hold time. Also available in -150°C versions

Features include:


- Dry sample storage
- -190°C top box temperature
- Lowest liftover height
- Largest LN2 capacity below turn tray



Optional Step
(recommended for 818 and 819)


Temperature Test Graph

* Temp Test indicates typical performance of 800 Series -190°C freezer with full inventory system and factory recommended level settings. Actual performance may vary with atmospheric conditions and usage.

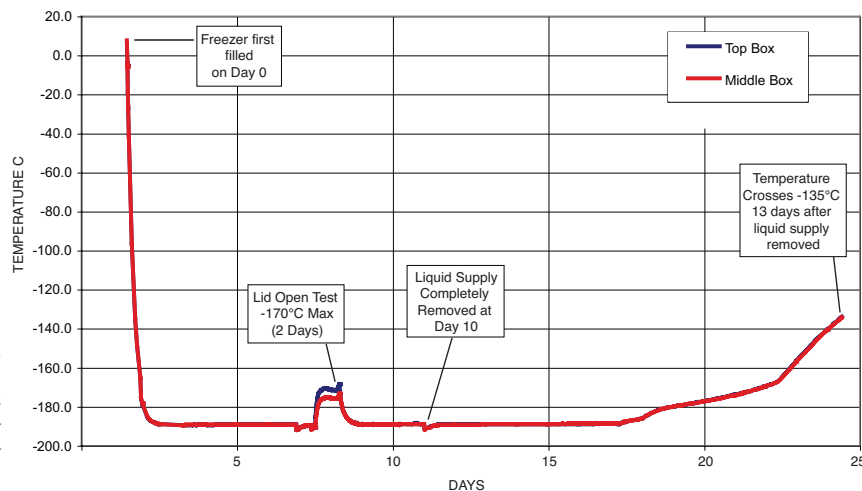


Rack Layouts (P)

Square Rack Layout

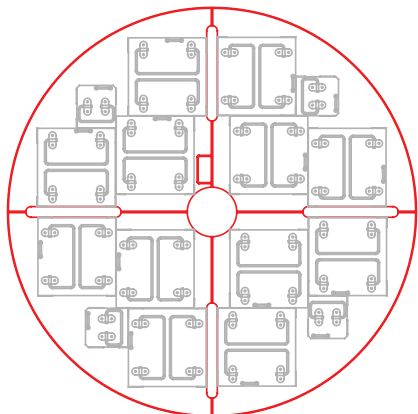

4R9951 Layout

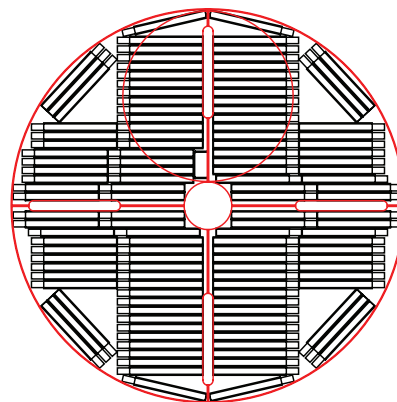

MVE 815P-190 MVE 818P-190 MVE 819P-190

Maximum Storage Capacity									
1.2 & 2 ml Vials (Internally Threaded)	15.600			18.200			19.500		
Number of Racks 100 cell boxes	12			12			12		
Number of Racks 25 cell boxes	4			4			4		
Number of Stages per Rack	12			14			15		
High Security Straw Capacity (0.5 ml)	36.960			46.200			55.440		
Number of Canisters (73 mm)	55			55			55		
Goblets/Canister : Straws/Goblet	4: 168			5:168			6:168		
Performance									
LN2 Capacity L	370			420			463		
LN2 Capacity Under Platform Vapor Storage L	52			55			55		
Unit Dimensions									
Neck Opening in. (mm)	12,5 (317)			12,5 (317)			12,5 (317)		
Usable Internal Height in. (mm)	26,6 (676)			30,7 (781)			34,5 (877)		
Inner Diameter in. (mm)	28,8 (731)			28,8 (731)			28,8 (731)		
Overall Height in. (mm)	49,0 (1.245)			53,3 (1.353)			57,0 (1.449)		
Door Width Requirement** in. (mm)	32,0 (813)			32,0 (813)			32,0 (813)		
Weight Empty lb. (kg)	475 (215)			495 (225)			515 (234)		
Weight Liquid Full* lb. (kg)	1.134 (514)			1.168 (530)			1.340 (608)		
Blood Bag Capacities									
	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames
791 OS/U (25 ml)	1.224	6	204	1.632	8	204	1.836	9	204
Compact (25ml)	2.064	8	258	2.322	9	258	2.838	11	258
4R9951 (50 ml)	768	6	128	896	7	128	1.024	8	128
4R9953 (250 ml)	416	4	104	416	4	104	520	5	104
4R9955 (500 ml)	304	4	76	304	4	76	380	5	76
DF200 (200 ml)	236	4	59	236	4	59	295	5	59
DF700 (700 ml)	-	-	-	-	-	-	-	-	-

TWO Year Standard Warranty • FIVE Year Vacuum Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU. Freezer systems UL/C-UL Listed.

* Without inventory

**Minimum width required for vessel to pass through opening. Footprint may vary. Contact Tech Service for detailed drawings.

MVE 1500 Series -190°C High Efficiency Freezer



The MVE 1500 Series -190°C freezers provide cryogenic storage for up to 42,000 1.2 / 2.0 ml vials. These freezers provide maximum storage density and provide the industry's longest hold time.


Also available in -150°C versions

Features include:

- Dry sample storage
- -190°C top box temperature
- Lowest liftover height
- Largest LN2 capacity below turn tray
- 2-tier folding step




Temperature Test*

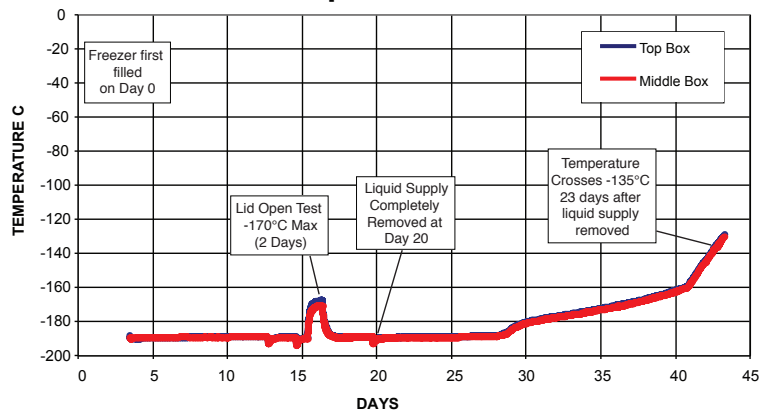


Temperature Test Graph

* Temp Test indicates typical performance of 1500 Series -190°C freezer with full inventory system and factory recommended level settings. Actual performance may vary with atmospheric conditions and usage.


Square Rack Layout (P)

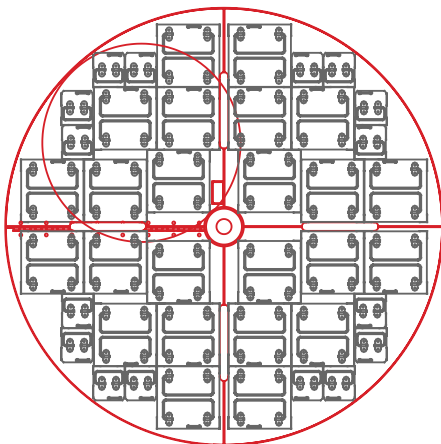

Rack Layouts
Square Rack Layout (R)

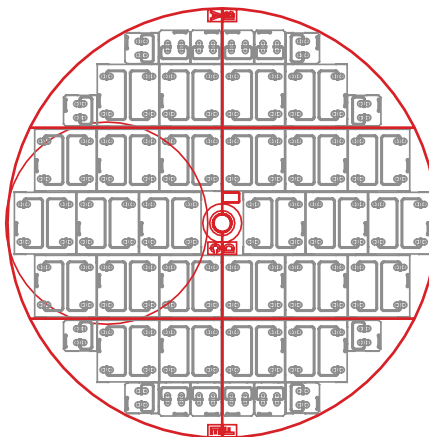

4R9551 Layout (R)

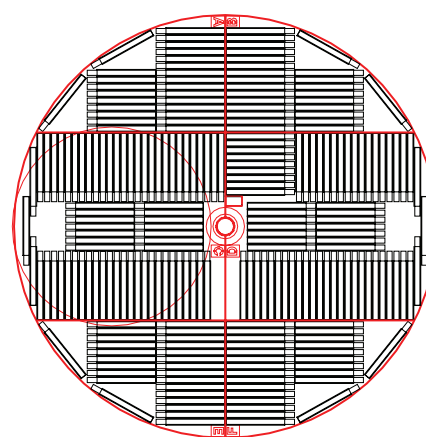

MVE 1536P-190

MVE 1539P-190

MVE 1542R-190

Maximum Storage Capacity

1.2 & 2 ml Vials (Internally Threaded)	36.400	39.200	42.000
Number of Racks 100 cell boxes	24	24	26
Number of Racks 25 cell boxes	16	16	16
Number of Stages per Rack	13	14	14
High Security Straw Capacity (0.5 ml)	100.800	100.800	100.800
Number of Canisters (73 mm)	120	120	120
Goblets/Canister : Straws/Goblet	5:168	5:168	5:168

Performance

LN2 Capacity L	756	797	797
LN2 Capacity Under Platform Vapor Storage L	133	133	133

Unit Dimensions

Neck Opening <i>in. (mm)</i>	17,5 (445)	17,5 (445)	17,5 (445)
Usable Internal Height <i>in. (mm)</i>	28,8 (732)	30,8 (782)	30,8 (782)
Inner Diameter <i>in. (mm)</i>	38,5 (978)	38,5 (978)	38,7 (983)
Overall Height <i>in. (mm)</i>	61,3 (1.556)	63,3 (1.607)	63,3 (1.607)
Liftover Height <i>in. (mm)</i>	37,0 (940)	39,2 (995)	39,2 (995)
Door Width Requirement** <i>in. (mm)</i>	42,0 (1.067)	42,0 (1.067)	42,0 (1.067)
Depth of Extended Step <i>in. (mm)</i>	7,9 (201)	7,9 (201)	7,9 (201)
Weight Empty <i>lb. (kg)</i>	690 (313)	720 (327)	720 (327)
Weight Liquid Full* <i>lb. (kg)</i>	2.037 (924)	2.140 (971)	2.140 (971)

Blood Bag Capacities

	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames
791 OS/U (25 ml)	3.080	7	440	3.064	8	383	3.184	8	398
Compact (25ml)	4.338	9	482	4.338	9	482	4.464	9	496
4R9551 (50 ml)	1.488	6	248	1.736	7	248	1.687	7	241
4R9553 (250 ml)	812	4	203	812	4	203	768	4	192
4R9555 (500 ml)	608	4	152	608	4	152	576	4	144
DF200 (200 ml)	496	4	124	496	4	124	488	4	122
DF700 (700 ml)	256	4	64	256	4	64	264	4	66

TWO Year Standard Warranty • FIVE Year Vacuum Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU. Freezer systems UL/C-UL Listed.

* Without inventory

**Minimum width required for vessel to pass through opening. Footprint may vary. Contact Tech Service for detailed drawings.

MVE 1800 Series -190°C High Efficiency Freezer

The MVE 1800 Series -190°C freezers provide cryogenic storage for up to 94,500 1.2 / 2.0 ml vials. These freezers provide maximum storage density and provide the industry's longest hold time.

Also available in -150°C versions


Features include:

- Dry sample storage
- -190°C top box temperature
- Lowest liftover height
- Largest LN2 capacity below turn tray
- Two tier folding step




Temperature Test Graph

* Temp Test indicates typical performance of 1800 Series -190°C freezer with full inventory system and factory recommended level settings. Actual performance may vary with atmospheric conditions and usage.

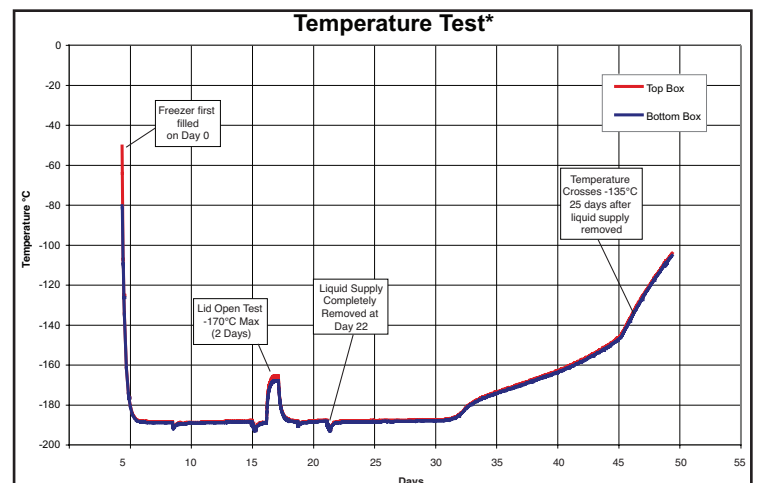


Rack Layouts

Square Rack Layout (P)

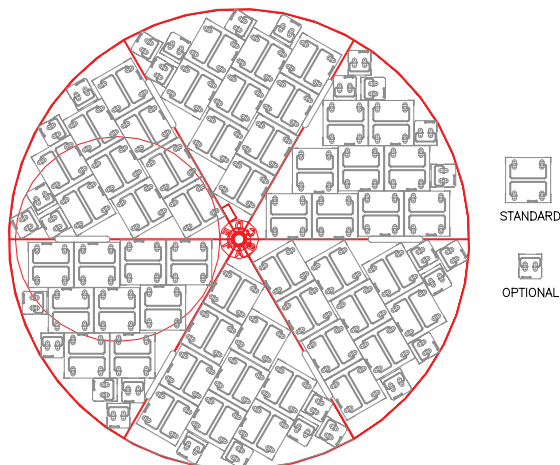

4R9951 Layout (R)

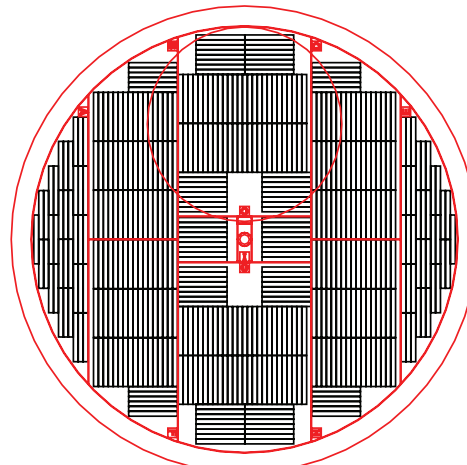

MVE 1879P-190 MVE 1881R-190 MVE 1892P-190 MVE 1894R-190

Maximum Storage Capacity	MVE 1879P-190	MVE 1881R-190	MVE 1892P-190	MVE 1894R-190
1.2 & 2 ml Vials (Internally Threaded)	79.950	81.900	92.250	94.500
Number of Racks 100 cell boxes	54	60	54	60
Number of Racks 25 cell boxes	30	12	30	12
Number of Stages per Rack	13	13	15	15
High Security Straw Capacity (0.5 ml)	236.880	213.360	284.256	256.032
Number of Canisters (73 mm)	282	254	282	254
Goblets/Canister : Straws/Goblet	5:168	5:168	6:168	6:168

Performance	MVE 1879P-190	MVE 1881R-190	MVE 1892P-190	MVE 1894R-190
LN2 Capacity L	1.745	1.745	17.70	1.770
LN2 Capacity Under Platform Vapor Storage L	318	318	296	296

Unit Dimensions	MVE 1879P-190	MVE 1881R-190	MVE 1892P-190	MVE 1894R-190
Neck Opening in. (mm)	25,0 (635)	25,0 (635)	25,0 (635)	25,0 (635)
Usable Internal Height in. (mm)	29,5 (749)	29,2 (741)	34,5 (876)	34,2 (868)
Inner Diameter in. (mm)	56,0 (1.422)	54,8 (1.391)	56,0 (1.422)	54,8 (1.391)
Overall Height in. (mm)	62,1 (1.577)	61,3 (1.556)	67,1 (1.704)	66,3 (1.683)
Door Width Requirement** in. (mm)	60,0 (1.524)	60,0 (1.524)	60,0 (1.524)	60,0 (1.524)
Weight Empty lb. (kg)	1.606 (728)	1.721 (781)	1.545 (701)	1.721 (781)
Weight Liquid Full* lb. (kg)	4.585 (2.080)	4.830 (2.192)	4.803 (2.179)	4.875 (2.211)

Blood Bag Capacities	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames
791 OS/U (25 ml)	5.866	7	838	5.628	7	804	6.704	8	838	6.432	8	804
Compact (25ml)	8.622	9	958	9.414	9	1.046	10.538	11	958	11.506	11	1.046
4R9951 (50 ml)	2.952	6	492	2.940	6	490	3.936	8	492	3.920	8	490
4R9953 (250 ml)	1.584	4	396	1.608	4	402	1.980	5	396	2.010	5	402
4R9955 (500 ml)	1.104	4	276	1.240	4	310	1.380	5	276	1.550	5	310
DF200 (200 ml)	960	4	240	984	4	246	1.200	5	240	1.230	5	246
DF700 (700 ml)	504	4	126	544	4	136	630	5	126	680	5	136

TWO Year Standard Warranty • FIVE Year Vacuum Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU. Freezer systems UL/C-UL Listed.

* Without inventory

**Minimum width required for vessel to pass through opening. Footprint may vary. Contact Tech Service for detailed drawings.

MVE Variō™ Series



The MVE Variō™ Series is the new innovative and energy efficient alternative for ultra low temperature to cryogenic storage. The completely dry sample storage area will maintain a user-defined temperature anywhere between -50°C and -150°C. The MVE Variō Series significantly reduces the possibility of sample contamination via contact with LN2 while providing the safety margin and consistent temperature profile, even with the lid open, that is associated with LN2 based cryogenic storage. The MVE Variō Series is able to provide all of this with less than 1% of the power consumption and approximately 70% overall operating cost savings when compared to the leading mechanical freezers.


Features include:

- Approximately 70% operating cost savings compared to leading mechanical freezers (-80 °C)
- Less than 1% of the electricity consumption compared to leading mechanical freezers (-80 °C)
- Completely dry storage area
- Consistent temperature profile, even with lid open
- Improved processing time, minimal increase in temperature when warm samples introduced
- No thermal load; no heat introduced into room and no additional HVAC required
- No more expensive compressors to replace
- Convertible asset: Can be field retrofitted to be a traditional LN2 freezer





Temperature Test Graph

* Temp Test indicates typical performance of MVE Variō Series freezer with full inventory system and factory recommended level settings. Actual performance may vary with atmospheric conditions and usage.

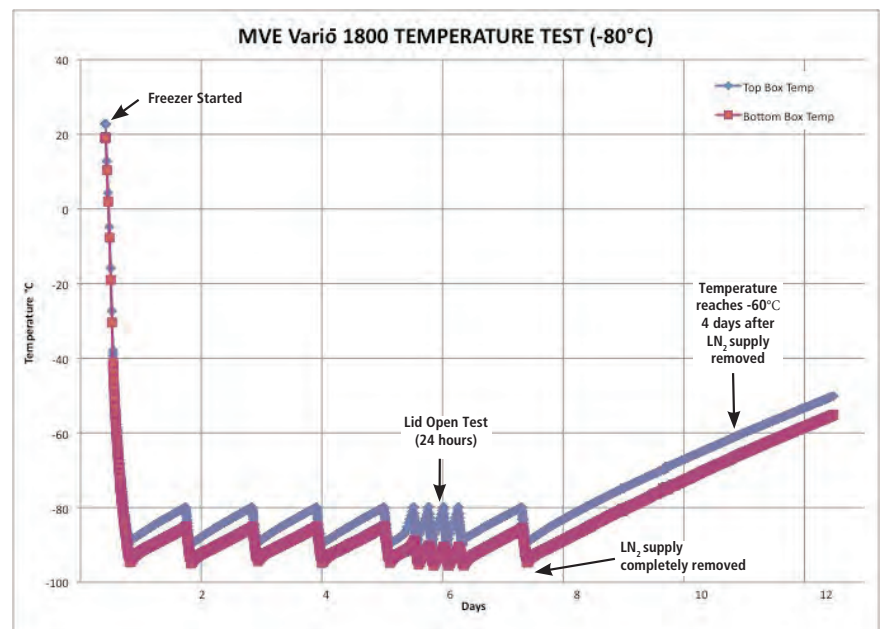


Rack Layouts

Square Rack Layout

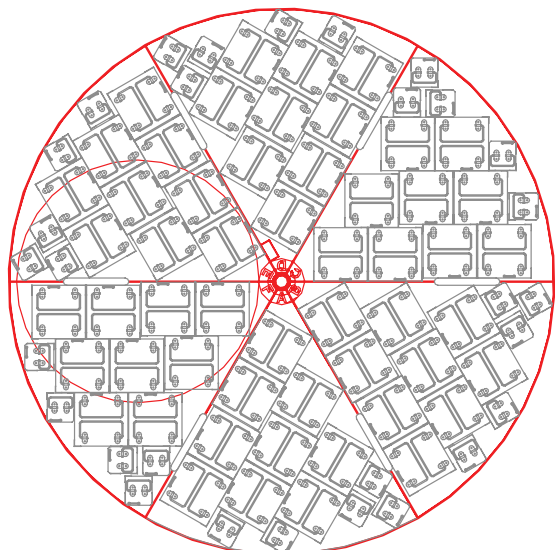

4R9951 Layout

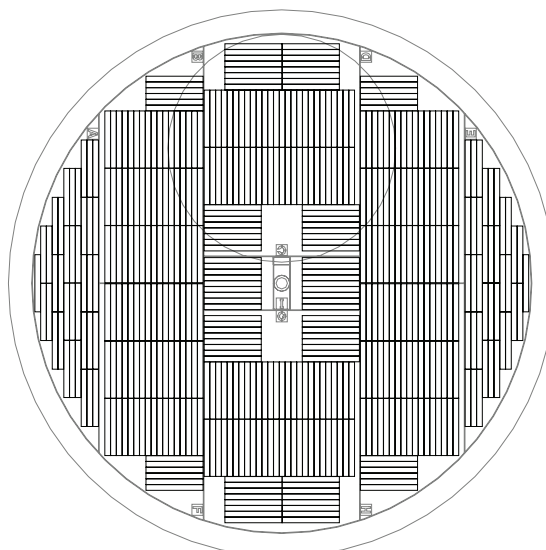

MVE Variō 1536P

MVE Variō 1539R

MVE Variō 1879P

MVE Variō 1881R

Maximum Storage Capacity

1.2 & 2 ml Vials (Internally Threaded)	36.400	39.000	79.950	81.900
Number of Racks 100 cell boxes	24	26	54	60
Number of Racks 25 cell boxes	16	16	30	12
Number of Stages per Rack	13	13	13	13

Performance

Temperature Range	-50°C, -150°C	-50°C, -150°C	-50°C, -150°C	-50°C, -150°C
LN ₂ Usage at -80°C L/day	9	9	12	12
Power consumption (cont.) W	8	8	8	8

Unit Dimensions

Neck Opening in. (mm)	17,5 (445)	17,5 (445)	25,0 (635)	25,0 (635)
Usable Internal Height in. (mm)	28,8 (732)	28,8 (732)	29,5 (749)	29,2 (741)
Inner Diameter in. (mm)	38,5 (978)	38,5 (978)	56,0 (1.422)	54,8 (1.391)
Overall Height in. (mm)	61,3 (1.556)	61,3 (1.556)	62,1 (1.577)	61,3 (1.556)
Door Width Requirement* in. (mm)	42,0 (1.067)	42,0 (1.067)	60,0 (1.524)	60,0 (1.524)
Weight Empty lb. (kg)	690 (313)	690 (313)	1.606 (728)	1.721 (781)

Blood Bag Capacities

	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames
791 OS/U (25 ml)	3.080	7	440	2.786	7	398	5.866	7	838	5.628	7	804
Compact (25 ml)	4.338	9	482	3.924	9	436	8.622	9	958	9.414	9	1.046
4R9951 (50 ml)	1.488	6	248	1.446	6	241	2.952	6	492	2.940	6	490
4R9953 (250 ml)	812	4	203	768	4	192	1.584	4	396	1.608	4	402
4R9955 (500 ml)	608	4	152	576	4	144	1.104	4	276	1.240	4	310
DF200 (200 ml)	496	4	154	488	4	122	960	4	240	984	4	246
DF700 (700 ml)	256	4	64	204	4	66	504	4	126	544	4	136

TWO Year Standard Warranty • FIVE Year Vacuum Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU.

*Minimum width required for vessel to pass through opening. Footprint may vary. Contact Tech Service for detailed drawings.

MVE Series



The MVE Series freezers provide stable cryogenic storage for up to 39,000 1.2 / 2.0 ml vials. These freezers provide maximum storage density and provide the industry's longest hold time. Although engineered for liquid storage, the MVE Series freezers can be operated in vapor using available vapor storage accessory packs.


Features include:

- Liquid sample storage
- Wide neck opening
- Lowest liftover height
- Largest LN2 capacity




Rack Layouts

Square Rack Layout

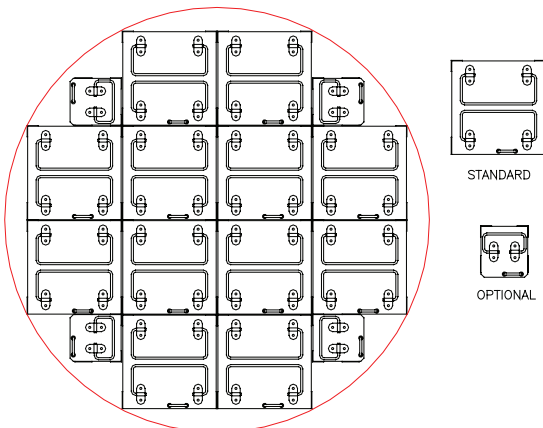


4R9951 Layout

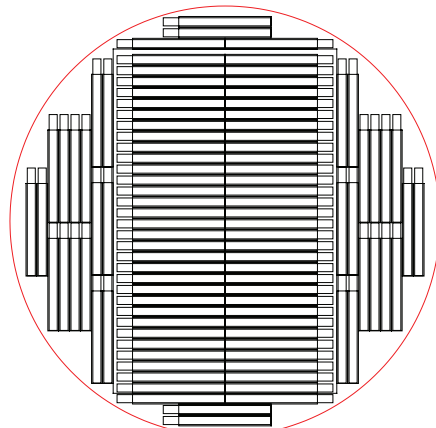


Rack Layouts

4R9953 Layout

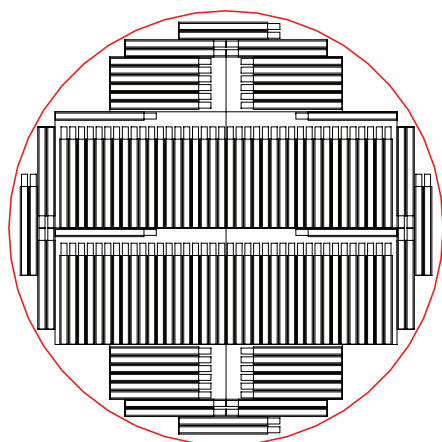

DF700 Layout

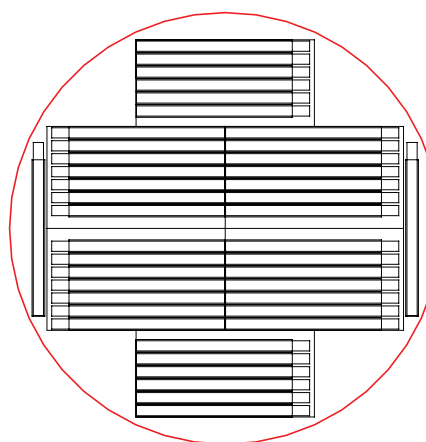

MVE 204* **MVE 205** **MVE 510** **MVE 616** **MVE 1426** **MVE 1839**

Maximum Storage Capacity

1.2 & 2 ml Vials (Internally Threaded)	3.200	5.200	10.400	16.900	26.650	39.000
Number of Racks 100 cell boxes	4	4	7	12	18	28
Number of Racks 25 cell boxes	-	-	4	4	10	8
Number of Stages per Rack	8	13	13	13	13	13
High Security Straw Capacity (0.5 ml)	11.592	19.320	32.760	50.400	79.800	151.200
Number of Canisters (73 mm)	23	23	39	60	95	150
Goblets/Canister : Straws/Goblet	3:168	5:168	5:168	5:168	5:168	6:168

Performance

LN2 Capacity <i>L</i>	65	95	166	240	388	673
-----------------------	----	----	-----	-----	-----	-----

Unit Dimensions

Neck Opening <i>in. (mm)</i>	16,00 (406)	16,00 (406)	20,70 (527)	25,10 (638)	31,75 (806)	39,40 (1.002)
Usable Internal Height <i>in. (mm)</i>	19,7 (502)	28,9 (735)	30,0 (762)	29,5 (749)	29,3 (745)	33,6 (854)
Inner Diameter <i>in. (mm)</i>	16,00 (406)	16,00 (406)	20,70 (527)	25,13 (638)	31,75 (806)	39,40 (1.002)
Overall Height <i>in. (mm)</i>	30,8 (784)	41,6 (1.059)	46,7 (1.185)	45,8 (1.161)	42,4 (1.076)	54,0 (1.372)
Door Width Requirement** <i>in. (mm)</i>	18.0 (457)	20,4x18,5 (518x470)	30,6x29,7 (778x754)	33,5x34,6 (852x878)	33,8x41,6 (858x1.056)	46,1x48,3 (1.172x1.225)
Weight Empty <i>lb. (kg)</i>	79 (36)	195 (88)	281 (127)	320 (145)	490 (222)	750 (341)
Weight Liquid Full* <i>lb. (kg)</i>	195 (88)	365 (166)	577 (262)	748 (339)	1181 (536)	1950 (885)

Blood Bag Capacities

	Total Bags/ Bags	No. Frame	No. Frames	Total Bags/ Bags	No. Frame	No. Frames	Total Bags/ Bags	No. Frame	No. Frames	Total Bags/ Bags	No. Frame	No. Frames	Total Bags/ Bags	No. Frame	No. Frames	Total Bags/ Bags	No. Frame	No. Frames
791 OS/U (25 ml)	-	-	-	539	7	77	882	7	126	1.372	7	196	2.226	7	318	3.968	8	496
4R9951 (50 ml)	-	-	-	228	6	38	420	6	70	612	6	102	924	6	154	1.856	8	232
4R9953 (250 ml)	-	-	-	128	4	32	224	4	56	336	4	84	512	4	128	1.010	5	202
4R9955 (500 ml)	-	-	-	96	4	24	160	4	40	248	4	62	424	4	106	770	5	154
DF200 (200 ml)	-	-	-	80	4	20	128	4	32	200	4	50	336	4	84	610	5	122
DF700 (700 ml)	-	-	-	40	4	10	68	4	17	116	4	29	168	4	42	380	5	76

TWO Year Standard Warranty • FIVE Year Vacuum Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU. Freezer systems UL/C-UL Listed.

* Without inventory


**Minimum width required for vessel to pass through opening. Footprint may vary. Contact Tech Service for detailed drawings.

MVE Stock Series

The MVE Stock Series provides the ultimate in security for the breeding industry and are primarily used to store semen and embryos. The freezers are designed for pull and pack shipment, with a wide neck opening for easy access. Although engineered for full liquid storage, the MVE Stock Series can be operated in vapor using the available vapor storage accessory packs.


Features include:

- Wide neck opening
- Lowest liftover height
- Largest LN2 capacity

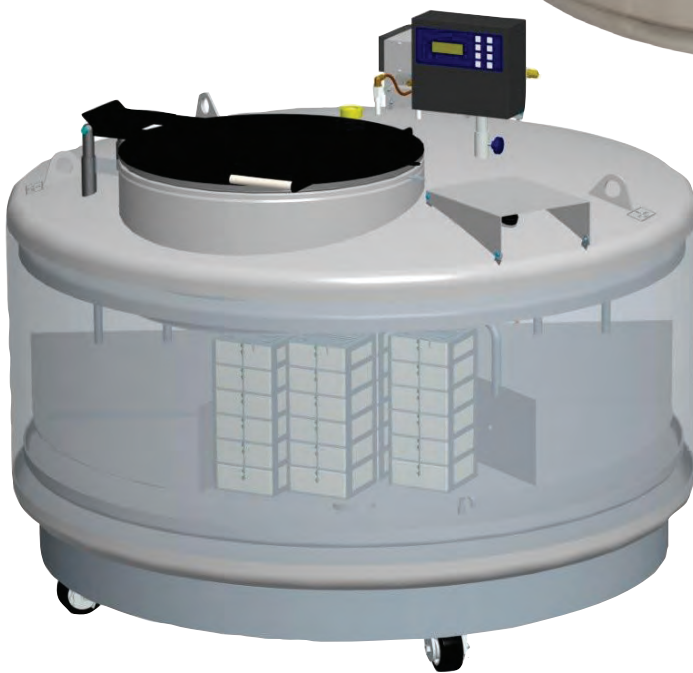


Rack Layouts

1877P-2T-150

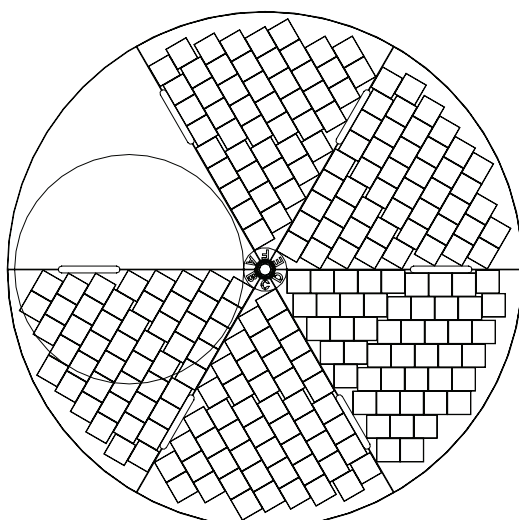

TOP TIER CAPACITY
245 BOXES

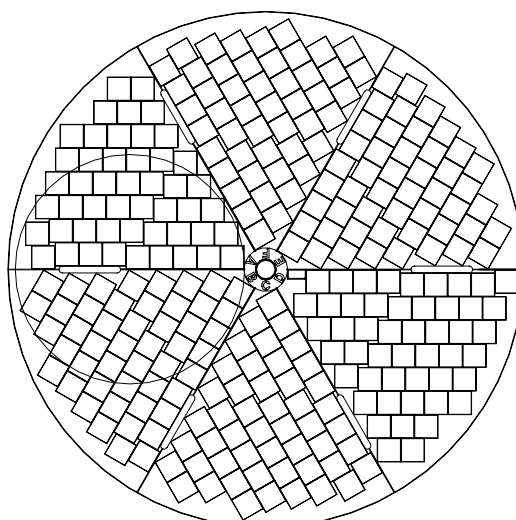

BOTTOM TIER CAPACITY
294 BOXES

MVE	MVE	MVE	MVE	MVE	MVE
103	808	816P-2T-190	1318	1842P-150	1877P-2T-150

Maximum Storage Capacity

1.2 & 2 ml Vials

	MVE 103	MVE 808	MVE 816P-2T-190	MVE 1318	MVE 1842P-150	MVE 1877P-2T-150
(Internally Threaded)	-	11.700	10.500	20.800	-	-
Number of Racks 100 cell boxes	-	12	105	24	-	-
Number of Racks 25 cell boxes	-	4	-	8	-	-
Total Number of Racks	-	16	21	32	-	-
High Security Straw Capacity (0.5 ml)	7.728	37.296	63.168	76.104	-	347.424
Number of Canisters (73 mm)	23	74	94	151	-	517
Goblets/Canister : Straws/Goblet	2:168	3:168	4:168	3:168	2:168	4:168
Number of SUC-1 canisters (2.5"x2.5"x11)	22	61	115	129	294	539
Number of 1.2 ml vials on canes	3.168	8.784	16.560	18.576	42.336	77.616
Number of 2.0 ml vials on canes	1.760	4.880	9.200	10.320	23.520	43.120
Number of 1/2 cc straws 10/cane	6.820	18.910	35.650	39.990	91.140	167.090

Performance

	MVE 103	MVE 808	MVE 816P-2T-190	MVE 1318	MVE 1842P-150	MVE 1877P-2T-150
LN2 Capacity L	39	230	381	482	915	1.400

Unit Dimensions

	MVE 103	MVE 808	MVE 816P-2T-190	MVE 1318	MVE 1842P-150	MVE 1877P-2T-150
Neck Opening in. (mm)	16,0 (406)	25,0 (634)	12,5 (317)	35,5 (901)	25,0 (635)	25,0 (635)
Usable Internal Height in. (mm)	12,0 (305)	22,0 (558)	13,0 (330) per level	18,8 (479)	13,0 (332)	13,0 (330) per tray
Inner Diameter in. (mm)	16,00 (406)	28,30 (720)	28,70 (728) top tray 27,70 (702) bottom	39,60 (1.007)	56,25 (1.29)	56,25 (1.429)
Overall Height in. (mm)	16,4 (415)	42,8 (1.088)	50,0 (1.271)	47,0 (1.193)	44,3 (1.127)	58,2 (1.479)
Door Width Requirement** in. (mm)	18 (457)	31 (787)	32 (813)	42 (1067)	60 (1524)	60 (1524)
Weight Empty lb. (kg)	48 (22)	250 (114)	475 (215) est.	469 (213)	1.167 (530)	1.600 (726)
Weight Liquid Full* lb. (kg)	117 (53)	660 (300)	1.155 (524) est.	1.328 (602)	2.798 (1270)	4.094 (1857)

TWO Year Standard Warranty • FIVE Year Vacuum Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU. Freezer systems UL/C-UL Listed.

* Without inventory

** Minimum width required for vessel to pass through opening. Footprint may vary. Contact Tech Service for detailed drawings.

MVE Cabinet Series

The MVE Cabinet Series provides stable cryogenic storage for up to 26,550 1.2 / 2.0 ml vials in a square outer package. These freezers provide maximum storage density and the industry's longest hold time. Although engineered for storage in liquid, the MVE Cabinet Series can be operated in vapor using available vapor storage accessory packs.



Features include:

- Liquid sample storage
- Ergonomic design
- Largest LN2 capacity




Rack Layouts

Square Rack Layout

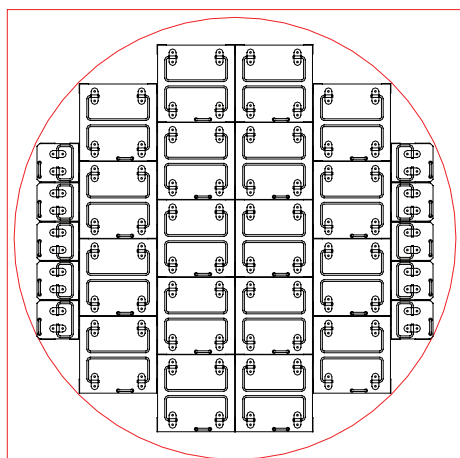

4R9951 Layout

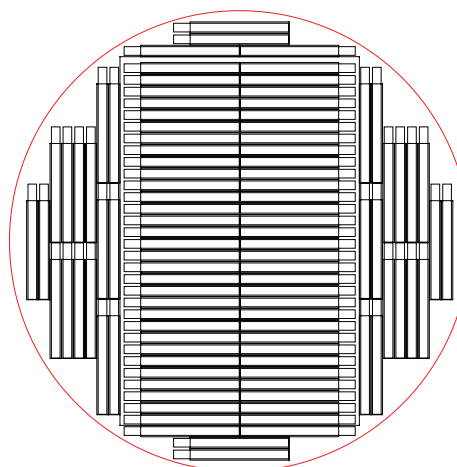

MVE 616C

MVE 1426C

Maximum Storage Capacity

	MVE 616C	MVE 1426C
1.2 & 2 ml Vials (Internally Threaded)	16.900	26.650
Number of Racks 100 cell boxes	12	18
Number of Racks 25 cell boxes	4	10
Number of Stages per Rack	13	13
High Security Straw Capacity (0.5 ml)	50.400	79.800
Number of Canisters (73 mm)	60	95
Goblets/Canister : Straws/Goblet	5:168	5:168

Performance

	MVE 616C	MVE 1426C
LN2 Capacity L	243	388

Unit Dimensions

	MVE 616C	MVE 1426C
Neck Opening in. (mm)	25,1 (638)	31,8 (806)
Usable Internal Height in. (mm)	30,0 (762)	29,9 (759)
Overall Height in. (mm)	41,4 (1051)	42,3 (1075)
Outside Diameter in. (mm)	35,1x28 (892x711)	41,1x34,8 (1.044x883)
Inner Diameter in. (mm)	25,1 (638)	31,8 (806)
Door Width Requirement** in. (mm)	35,1x28 (892x711)	41,1x34,8 (1.044x883)
Weight Empty lb. (kg)	352 (160)	530 (240)
Weight Liquid Full* lb. (kg)	785 (356)	1.198 (543)

Blood Bag Capacities

	Total Bags	Bags/ Frame	No. Frames	Total Bags	Bags/ Frame	No. Frames
791 OS/U (25 ml)	1.372	7	196	2.226	7	318
4R9951 (50 ml)	612	6	102	924	6	154
4R9953 (250 ml)	336	4	84	512	4	128
4R9955 (500 ml)	248	4	62	424	4	106
DF200 (200 ml)	200	4	50	336	4	84
DF700 (700 ml)	116	4	29	168	4	42

TWO Year Standard Warranty • FIVE Year Vacuum Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU. Freezer systems UL/C-UL Listed.

* Without inventory

**Minimum width required for vessel to pass through opening. Footprint may vary. Contact Tech Service for detailed drawings.

MVE CryoCart



MVE CryoCarts are designed for the loading of biological samples into canes, boxes, racks or frames. When used as a portable workbench, the unit will provide a safe and controlled environment for your samples for up to eight hours with the lid open. MVE CryoCart is ideal for transporting large quantities of samples from one tank to another within the same facility.

Features Include:

- Approximate hold time of 18 hours with lid on
- Omega temperature monitor with type T Thermocouple
- Traceable calibration certificate with RS232 PC interface
- LN2 transfer hose connection with ball valve and relief valve
- Available without plumbing and temperature recorder

Product Specifications


Unit Capacity

LN2 Capacity To Top of Platform L	53
-----------------------------------	----

Unit Dimensions

Overall Length <i>in (mm)</i>	51,7 (1313)
Overall Width <i>in (mm)</i>	17,6 (447)
Overall Height <i>in (mm)</i>	38,9 (988)
Lift Overall Height <i>in (mm)</i>	36,3 (922)
Inside Length <i>in (mm)</i>	41,0 (1041)
Inside Width <i>in (mm)</i>	13,2 (335)
Inside Depth <i>in (mm)</i>	15,4 (391)
Platform Height <i>in (mm)</i>	6,0 (152)
Footprint <i>in (mm)</i>	17,6x51,7 (447x1.313)
Weight Empty <i>lb. (kg)</i>	241 (109)
Weight w/LN2 Filled To	
Top Of Platform <i>lb. (kg)</i>	356 (161)
Approximate Hold Time With Lid On <i>hrs</i>	18
Number of Racks (15-2)	2

MVE TEC 3000

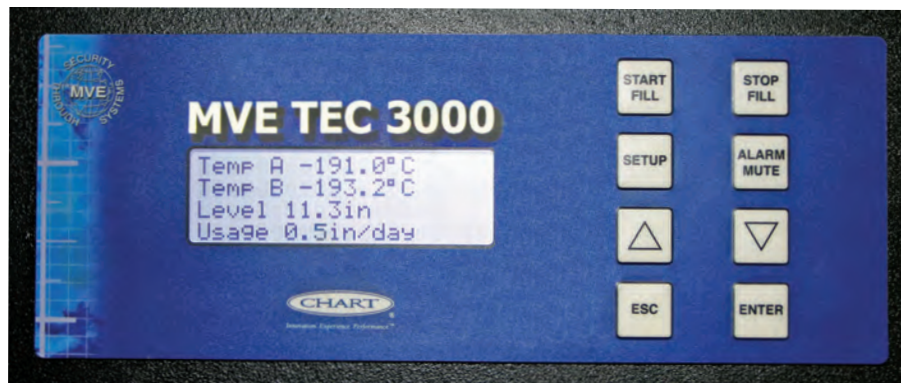

The TEC 3000 employs a variety of advanced features that enable the controller to monitor and control the environment inside a freezer with a high level of precision.

Liquid Nitrogen Level Measurement

The TEC 3000 uses a differential pressure system to determine the LN2 level to an accuracy of ± 0.5 in. (15 mm) and a resolution of 0.1 in. (5.0 mm). Unlike alternative level sensing systems, differential pressure allows the exact level to be measured and displayed. Using the simple single point calibration in a range of 3.0 in. to 48.0 in. (75 mm to 1220 mm), the patented, self-maintaining, closed-loop system displays in inches, millimeters, or a percentage full.

Automatic Liquid Nitrogen Level Control

The fully automated LN2 level control system is based on user-defined parameters that can be electronically adjusted over the entire level range. The parameters include Low Level Alarm, Low Level Fill Point, High Level Fill Point and High Level Alarm. The redundant Dual Solenoid Valves for overflow protection run on 24 VDC, 1.0 amp (max).

Liquid Usage

This exclusive feature provides an estimation of liquid usage to track LN2 consumption and can provide an early failure warning to allow sufficient time to implement corrective action and save irreplaceable samples.

User-Defined Alarms

A total of 17 audio/visual alarms are used to alert the user to any potential or developing problems. The alarms include: High Temperatures, Low Temperatures, High Level, Low Level, Liquid Usage, Maximum Fill Time, Gas Bypass, Temperature Calibrations, Low Battery, Power Failure, Lid Open and Communication Loss.

Remote Alarm Monitoring

The TEC 3000 Alarm monitoring includes a Global Remote Alarm Relay, as well as four discrete contacts for High Level, Low Level, Temp A High and Low Battery.

Temperature Measurement

Two independent temperature measurement channels are employed to accurately measure the temperature across the entire storage space. The two platinum RTD sensors have an accuracy of $\pm 1.0^\circ\text{C}$ and a resolution of 0.1°C . The temperature can be displayed in $^\circ\text{C}$, $^\circ\text{F}$ or K. The single or two point calibration also has altitude compensation for the highest accuracy.

Hot Gas Bypass

This unique feature is able to vent warm nitrogen gas from the supply line before initiating a fill. This prevents warm gas from entering the freezer space, which helps maintain a stable temperature gradient and increases the efficiency by reducing excess LN2 evaporation.

Event Log / Data Storage

The TEC 3000 is able to store vital, unalterable, time-stamped data in nonvolatile memory. This is a great tool for assessing freezer performance and troubleshooting any problems. The memory can store 30,000 events, an estimated 10 years of storage capacity. The data includes time-stamped temperatures, LN2 level, liquid usage, and any alarms or events.

Password Security

The multilevel security system comprised of up to ten user-specific programmable passwords and four security levels can be customized to grant or restrict personnel access to certain menus and settings.

Communication Capabilities

Two independent ports can be used to communicate with other TEC 3000 controllers, a remote PC, serial printer, or other RS-485 networks and devices. Options include ASCII, MODBUS, Printer and One Fill All Fill (OFAF).

MVE CryoSystem Series




The MVE CryoSystem Series combines the benefits of low nitrogen consumption with mid-range vial capacity to meet the diverse needs of today's professionals worldwide. The lightweight and low-space demands of these containers make them the most economical units in their class.

Features Include:

- Designed for large capacity storage
- Low liquid nitrogen consumption
- Convenient lightweight package

Tank Features

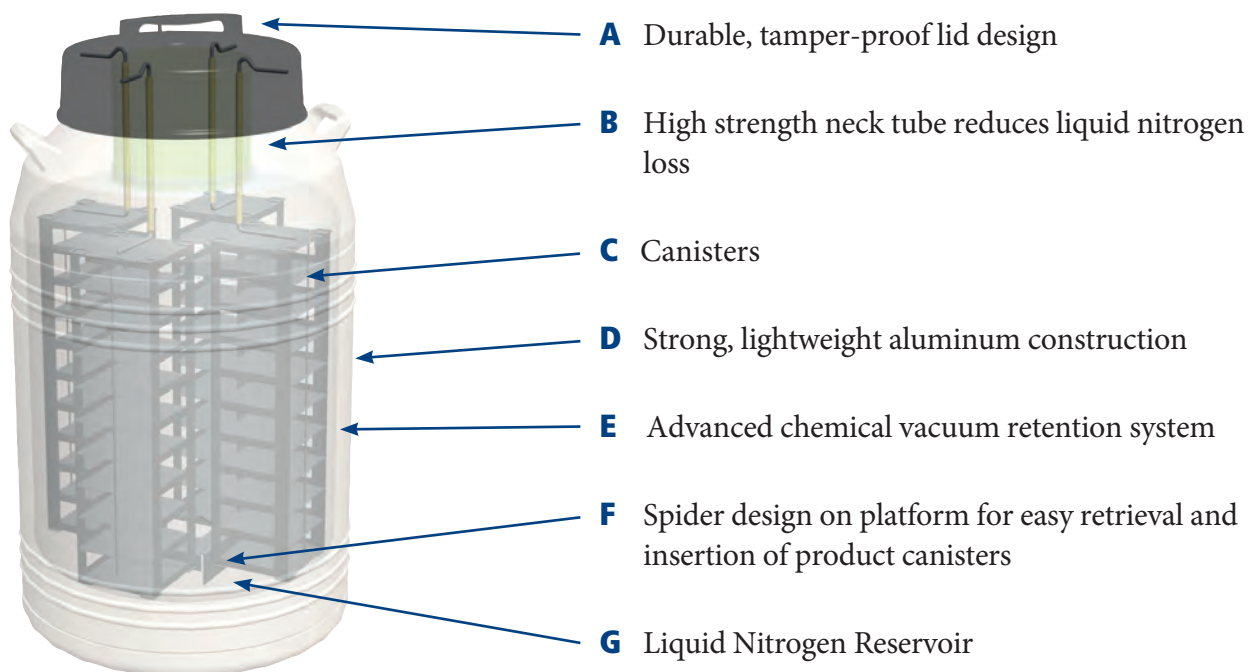

- A** Durable, tamper-proof lid design
- B** High strength neck tube reduces liquid nitrogen loss
- C** Canisters
- D** Strong, lightweight aluminum construction
- E** Advanced chemical vacuum retention system
- F** Spider design on platform for easy retrieval and insertion of product canisters
- G** Liquid Nitrogen Reservoir

	CryoSystem 750	CryoSystem 2000	CryoSystem 4000	CryoSystem 6000
Maximum Storage Capacity				
Number of Canisters	6	4	4	6
Number of 1.2 & 2.0 ml vials 100/box	-	2.000	4.000	6.000
Number of 1.2 & 2.0ml via 25/box	750	-	-	-
Boxes per Rack	5	5	10	10
Performance				
LN2 Capacity L	47,4	61,0	121,0	175,0
Static Evaporation Rate* L/day	0,39	0,85	0,99	0,99
Working Volume L	47	51	111	165
Normal Working Duration**, Full Days	76	38	70	104
Unit Dimensions				
Neck Opening in. (mm)	5,0 (127)	8,5 (216)	8,5 (216)	8,5 (216)
Overall Height in. (mm)	26,50 (673)	27,25 (692)	38,00 (965)	37,75 (959)
Outer Diameter in. (mm)	20 (508)	22 (559)	22 (559)	26 (665)
Weight Empty lb. (kg)	42 (19,0)	58 (26,3)	81 (36,7)	103 (46,7)
Weight Full lb. (kg)	126 (57)	182 (82,5)	300 (136)	425 (193)

* Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

** Normal Working Duration is an arbitrary reference, to estimate container performance under normal operating conditions. Actual working time may vary due to current atmospheric conditions, container history, manufacturing tolerances and any individual patterns of use.

TWO Year Standard Warranty • THREE Year Vacuum Warranty
 Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU.

MVE SC Series




MVE offers the widest range of compact aluminum storage tanks available on the market today. Over the past 50 years, our product designs have improved through end-user input and evolved into a unique selection of units. The SC Series is designed for the user who has small capacity needs, but requires long-term storage and low liquid nitrogen consumption in a convenient lightweight package.

Features Include:

- Designed for large capacity storage
- Low liquid nitrogen consumption
- Convenient lightweight package

Tank Features

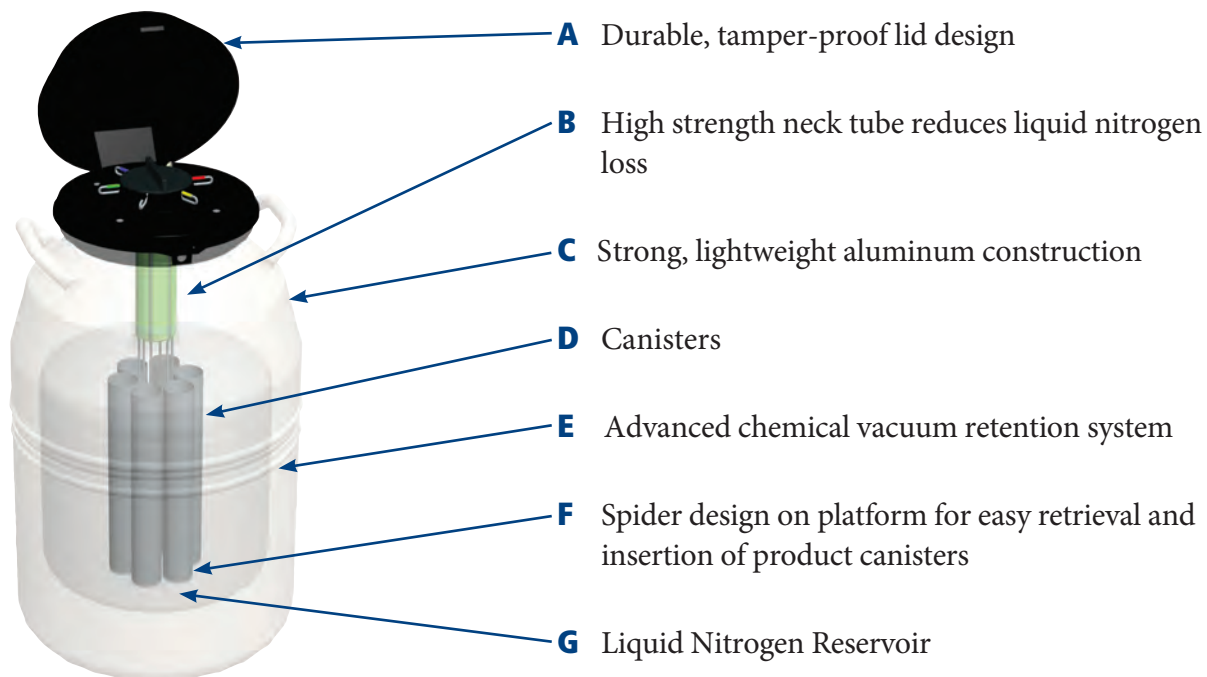

	SC 3/3	SC 8/5	SC 11/7	SC 16/11	SC 20/20	SC 33/26	SC 36/32	Super 2
Maximum Storage Capacity								
Number of Canisters	6	6	6	9	6	6	6	6
Number of 1/2 cc Straws 10/cane	-	-	720	-	540	540	540	720
Number of 1/2 cc Straws 1 Level Bulk	1.122	1.122	1.122	1.098	780	780	780	1.122
Number of 1.2 & 2.0 ml Vials 5/cane	-	-	210	-	150	150	150	210
Performance								
LN2 Capacity L	3,6	8,4	11,0	16,4	20,5	33,0	36,5	24,5
Static Evaporation Rate* L/day	0,13	0,15	0,16	0,14	0,09	0,13	0,10	0,085
Normal Working Duration**, Full Days	17	35	43	74	142	182	224	180
Unit Dimensions								
Neck Opening in. (mm)	2,18 (55)	2,18 (55)	2,18 (55)	2,18 (55)	2,00 (51)	2,00 (51)	2,00 (51)	2,18 (55,4)
Overall Height in. (mm)	16,0 (406)	18,5 (470)	21,6 (549)	17,5 (444)	25,7 (652)	25,9 (657)	27,2 (690)	28,2 (716)
Outer Diameter in. (mm)	8,7 (222)	10,2 (260)	10,2 (260)	17,2 (438)	14,5 (368)	18,2 (464)	18,2 (464)	14,5 (368)
Canister Height in. (mm)	5,0 (127)	5,0 (127)	11,0 (279)	5,0 (127)	11,0 (279)	11,0 (279)	11,0 (279)	11,0 (279)
Canister Diameter in. (mm)	1,65 (41,9)	1,65 (41,9)	1,65 (41,9)	1,50 (38)	1,50 (38)	1,50 (38)	1,50 (38)	1,65 (41,9)
Weight Empty lb. (kg)	8 (3,6)	12 (5,3)	17 (7,7)	14 (6,4)	26 (11,8)	34 (15,4)	34 (15,4)	26,5 (12)
Weight Full lb. (kg)	14,4 (65)	27,0 (12,1)	36,6 (16,6)	43,0 (19,6)	62,5 (28,3)	93,4 (42,4)	100,0 (44,8)	68,4 (31)

* Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

** Normal Working Duration is an arbitrary reference, to estimate container performance under normal operating conditions. Actual working time may vary due to current atmospheric conditions, container history, manufacturing tolerances and any individual patterns of use.

TWO Year Standard Warranty • FIVE Year Vacuum Warranty
Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU.

MVE XC Series




MVE XC Series tanks have capacities ranging from 700–5000 straws and 150 to over 1000 vials. Manufactured to a world class level of excellence and backed by an industry-leading 5 year vacuum warranty, these durable, lightweight units can be relied on to perform in the most demanding of environments.

Features Include:

- Designed for large capacity storage
- Low liquid nitrogen consumption
- Convenient lightweight package

Tank Features

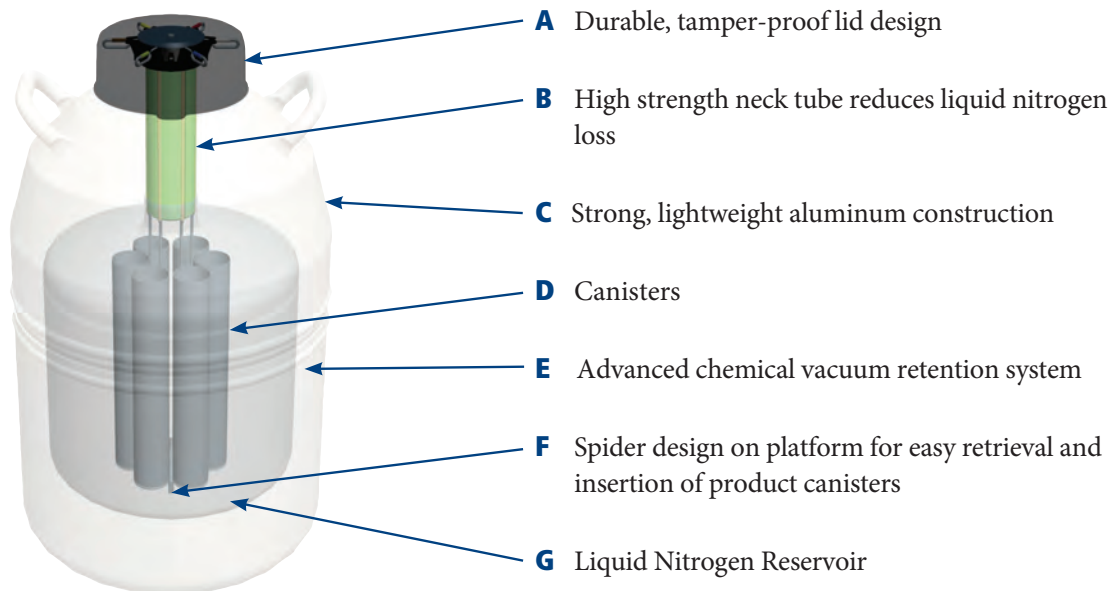

	XC 20 Millennium	XC 21/6	XC 22/5	XC 32/8	XC 33/22	XC 34/18	XC 34/18 Plus***	XC 43/28	XC 47/11-6SQ	XC 47/11-6	XC 47/11-10
--	------------------	---------	---------	---------	----------	----------	------------------	----------	--------------	------------	-------------

Maximum Storage Capacity

Number of Canisters	6	9	6	9	6	6	6	6	6 sq.	6	10
Number of 1/2 cc Straws 10/cane	720	N/A	2,400	2,520	1,260	2,100	2,100	1,260	-	4,500+	3,500
Number of 1/2 cc Straws 1 Level Bulk	1,122	3,870	3,666	3,960	1,764	300	3,000	1,764	-	6,216	5,000
Number of 1.2 & 2.0 ml Vials 5/cane	210	N/A	810	855	360	630	630	360	-	1,320	1,050
Number of Racks 25 Vials	-	-	-	-	-	-	-	-	750	-	-

Performance

LN2 Capacity L	20,5	21,0	22,4	32,0	33,4	67,5	34,8	42,2	47,4	47,4	47,4
LN2 Capacity Below Spider L	-	-	-	-	-	32,7	-	-	-	-	-
Static Evaporation Rate* L/day	,095	0,35	0,35	0,35	0,14	0,31	0,18	0,14	0,39	0,39	0,39
Normal Working Duration**, Full Days	135	38	40	57	154	136	123	193	76	76	76

Unit Dimensions

Neck Opening in. (mm)	2,18 (55)	3,50 (89)	3,81 (97)	3,81 (97)	2,75 (70)	3,5 (89)	3,50 (89)	2,75 (70)	5,00 (127)	5,00 (127)	5,00 (127)
Overall Height in. (mm)	25,7 (652)	17,2 (438)	22,0 (559)	21,5 (546)	26,0 (660)	37,5 (952)	26,6 (675)	26,4 (670)	26,5 (673)	26,5 (673)	26,5 (673)
Overall Inner Height in. (mm)	-	-	-	-	-	-	33,5 (850)	-	-	-	-
Outer Diameter in. (mm)	14,5 (368)	18,2 (464)	14,5 (368)	18,2 (464)	18,2 (464)	18,2 (46,4)	18,2 (464)	20,0 (508)	20,0 (508)	20,0 (508)	20,0 (508)
Canister Height in. (mm)	11 (279)	5 (127)	11 (279)	11 (279)	111 (279)	11 (279)	11 (279)	11 (279)	-	11 (279)	11 (279)
Canister Diameter in. (mm)	1,65 (41)	2,59 (68)	3,09 (79)	2,62 (67)	2,22 (56)	2,8 (71)	2,81 (71)	2,22 (56)	-	4,00 (102)	2,81 (71)
Distance: Platform to Top of Neck in. (mm)	-	-	-	-	-	-	21 (533)	-	-	-	-
Weight Empty lb. (kg)	23 (10,5)	24 (10,9)	26 (11,8)	30 (13,6)	34 (15,4)	45,9 (20,8)	34 (15,4)	36 (16,4)	42 (19,0)	42 (19,0)	42 (19,0)
Weight with Canisters lb. (kg)	-	-	-	-	-	-	45,9 (20,8)	-	-	-	-
Weight Full lb. (kg)	59,5 (27,0)	62 (28,1)	66,0 (30)	87,0 (39,5)	94,0 (42,5)	104,4 (47,3)	96,0 (43,5)	111,0 (50,5)	120,4 (54,6)	120,4 (54,6)	120,4 (54,6)

* Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

** Normal Working Duration is an arbitrary reference, to estimate container performance under normal operating conditions. Actual working time may vary due to current atmospheric conditions, container history, manufacturing tolerances and any individual patterns of use.

*** Weight full determined with LN2 level at bottom of canisters.

TWO Year Standard Warranty • FIVE Year Vacuum Warranty
Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU.

MVE Lab Series




The Lab Series cryogenic liquid dewars are named for their acceptance in laboratories and medical facilities worldwide. These high-efficiency, super insulated dewars are the most convenient, economical way to store and dispense liquid nitrogen. Many lab units can be fitted with pouring spouts, pressurized dispensing devices or dippers to aid in the transfer of liquid nitrogen.

Features Include:

- Designed for efficient storage of liquid nitrogen
- Low liquid nitrogen consumption
- Convenient lightweight package

Tank Features

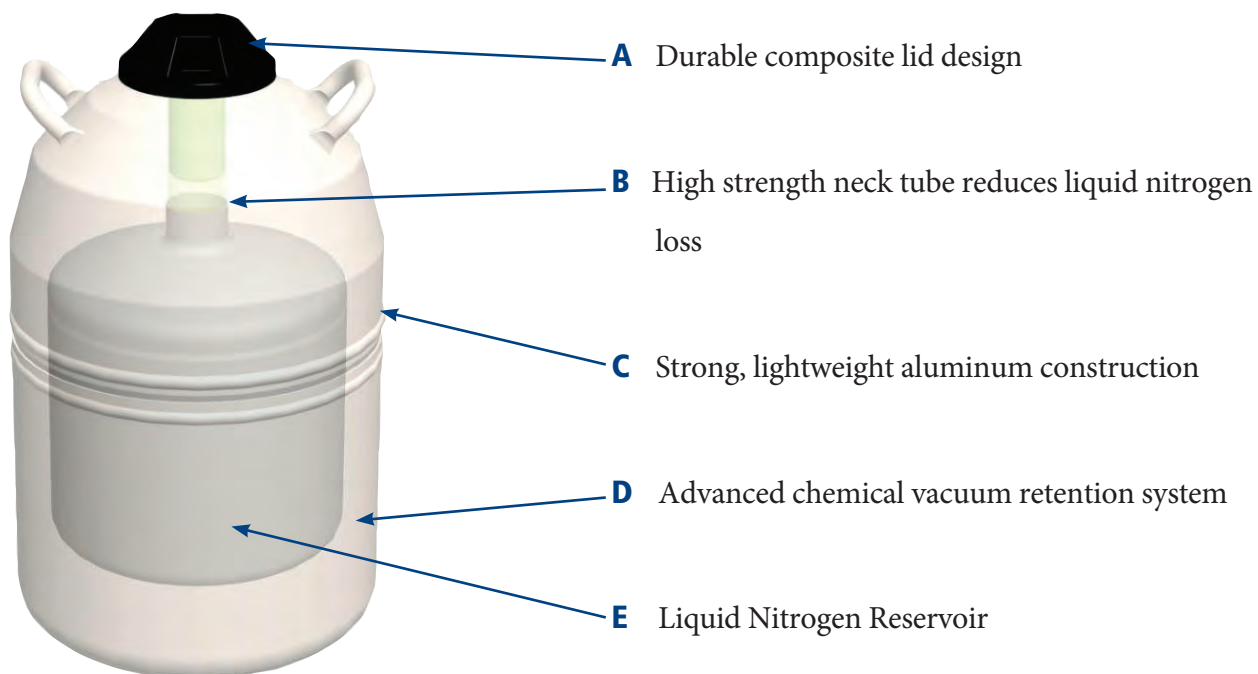

	LAB 4	LAB 5	LAB 10	LAB 20	LAB 30	LAB 50
Performance						
LN2 Capacity L	4	5	10	20	32	50
Static Evaporation Rate* L/day	0,19	0,15	0,18	0,18	0,22	0,49
Unit Dimensions						
Neck Opening in. (mm)	1,40 (35)	2,18 (56)	2,18 (56)	2,18 (51)	2,50 (64)	2,50 (64)
Useable Height in. (mm)	7,8 (198)	10,5 (266)	13,5 (343)	13,7 (348)	14,9 (378)	22,0 (559)
Overall Height in. (mm)	16,8 (426)	18,2 (462)	21,5 (546)	24,5 (622)	24,0 (610)	30,5 (775)
Outer Diameter in. (mm)	7,3 (185)	8,8 (222)	10,3 (260)	14,5 (368)	17,0 (432)	17,0 (432)
Internal Diameter in. (mm)	5,5 (139)	6,5 (165)	8,3 (210)	11,4 (289)	14,0 (356)	14,0 (356)
Weight Empty lb. (kg)	6 (2,7)	8 (4)	12 (5,4)	19 (9)	25 (11,4)	31 (14)
Weight Full lb. (kg)	13 (6)	17 (8)	31 (14)	55 (25)	82 (37,2)	120 (54,4)

* Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

TWO Year Standard Warranty • FIVE Year Vacuum Warranty
 Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU.



MVE CryShipper QWick & Vapor Series




MVE Vapor Shippers are designed for the safe transportation of biological samples at cryogenic (-150°C or colder) temperatures. MVE CryShipper QWick Series utilizes an absorbent wicking material that charges with liquid nitrogen in fewer than two hours, providing the capacity for same-day vapor shipping. Manufactured from durable, lightweight aluminum, both series employ a hydrophobic compound which absorbs the liquid nitrogen to ensure dry, spill-free vapor-phase shipping.

A protective shipping carton is available for all models (except the SC 20/12V). These containers may be used to ship your samples with a “non-hazardous” classification throughout the world, thus reducing costs and helping to assure sample viability.

Features Include:

- Protective shipping carton to ensure upright shipping
- Low liquid nitrogen consumption
- Convenient lightweight package
- QWick Series CHARGES IN LESS THAN TWO HOURS

Tank Features

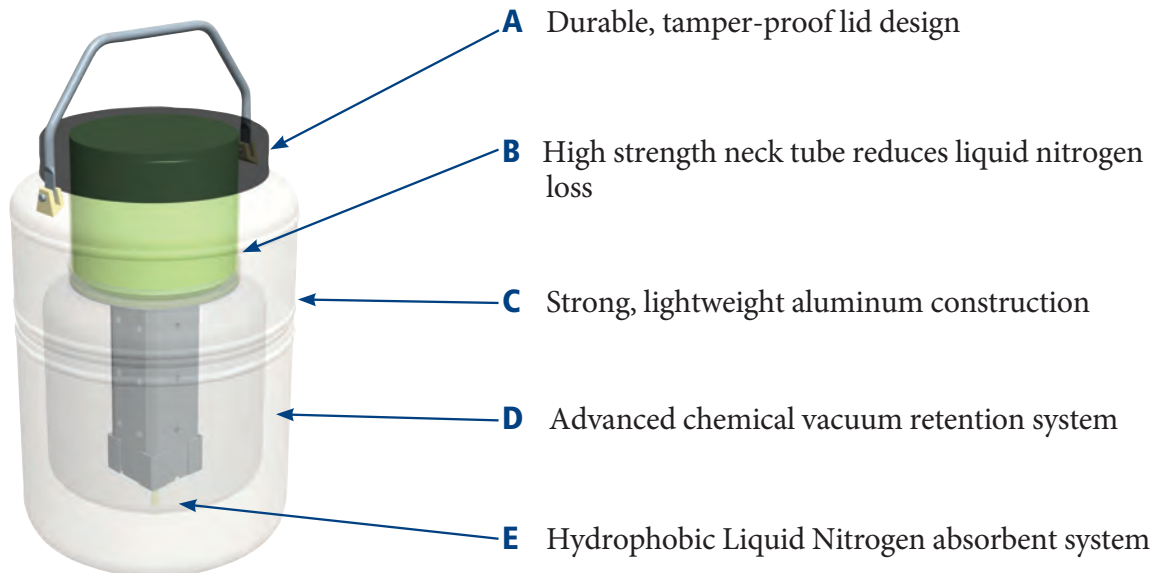

CryoShipper QWick Series	QWick 6/9	QWick 10/100	QWick 14/48	QWick 62/180	QWick 14/24	QWick 9/500	QWick 10/950				
Static Holding Time Days	6	10	14	62	14	9	10				
Vapor Series	SC 2/1V	SC 4/2V	SC 4/3V	SC 20/12V	XC 20/3V**	Mini Moover	CryoShipper Mini	Cryo Moover	Cryo Shipper	Cryo Shipper XC	IATA
Static Holding Time Days	8	13	21	85	16	14	7	12	10	14	14
Maximum Storage Capacity											
No. of Canisters	1	1	1	6	4 + 1 Center	1	-	7	1 Rack	-	Secondary Container
No. of 1/2 cc Straws 10/cane	-	280	120	540	2.500/2.000**	60	-	3.080	-	-	-
No. of 1/2 cc Straws 1 Level Bulk	88	440	210	780	3.750/3.000**	88	-	4.354	-	-	-
No. of 1/4 cc Straws 1 Level Bulk	182	938	452	1630	7.410/6.000	185	-	-	-	-	-
No. of 1.2 & 2.0 ml Vials 5/cane	-	95	40	150	675/560**	20	-	945	-	-	-
No. of 1.2 & 2.0 ml Vials 6/cane	9	106	48	180	840/672**	24	-	1134	500	966 (Bulk)	-
No. of blood bags stored 4R9953	-	-	-	-	-	-	-	-	10	10	-
Performance											
LN2 Capacity L	1,5	3,6	4,3	12,3	6,8	2,9	5,9	4,2	8,5	10,0	11,8
Static Evaporation Rate* L/day	0,19	0,26	0,20	0,09	0,35	0,20	0,84	0,35	0,85	0,80	0,80
Unit Dimensions											
Neck Opening in. (mm)	1,40 (35,0)	2,75 (70,0)	2,00 (51,0)	2,00 (51,0)	3,81 (96,7)	1,40 (35,0)	8,50 (216,0)	3,80 (97,0)	8,50 (216,0)	8,50 (216,0)	8,50 (216,0)
Overall Height in. (mm)	13,5 (343)	18,4 (468)	19,4 (492)	25,7 (652)	25,0 (635)	19,5 (495)	20,0 (508)	22,0 (558)	21,5 (546)	23,0 (584)	24,0 (610)
Outer Diameter in. (mm)	7,25 (184)	8,70 (222)	8,70 (222)	14,50 (368)	14,50 (368)	7,20 (184)	11,60 (295)	18,30 (464)	14,50 (369)	15,00 (381)	15,00 (381)
Canister Height in. (mm)	5,0 (127)	11,0 (278)	11,0 (278)	11,0 (278)	11,0 (278)	11,0 (278)	-	11,0 (278)	-	12,5 (317,5†)	8,5 (215)
Canister Diameter in. (mm)	1,20 (31)	2,62 (67)	1,81 (46)	1,50 (38)	3,20 (80)	1,20 (31)	-	3,10 (79)	-	-	7,50 (190)
Weight Empty lb. (kg)	6,0 (2,7)	11,0 (5,0)	13,0 (5,9)	30,0 (13,6)	28,4 (12,9)	8,0 (3,6)	16,5 (7,5)	30,5 (13,8)	26,2 (11,9)	31,0 (14,1)	29,0 (131,0)
Weight Full lb. (kg)	8,8 (4,0)	17,0 (7,7)	20,6 (9,3)	52,0 (23,6)	38,4 (17,4)	11,6 (5,3)	34,3 (15,5)	38,0 (17,2)	41,3 (18,7)	48,0 (21,8)	50,5 (22,9)

* Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

** With center absorbent canister (3 week holding time)

† Usable Height

THREE Year Vacuum Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU.

MVE Doble QWick & Doble Series




The Doble Series cryogenic liquid dewars are the first units to be designed for both vapor shipment and liquid storage. The Doble QWick Series utilizes an absorbent wicking material that charges with liquid nitrogen in fewer than two hours, providing the capacity for same-day vapor shipping. A unique absorbent layer in the base of the storage tanks of both series enables them to be charged with nitrogen and employed as dry shippers with hold times of up to 30 days. Once at the final destination, the tanks can be filled with liquid and used for long term storage, therefore avoiding the need for return shipments.

Features Include:

- Liquid and vapor storage options
- Low liquid nitrogen consumption
- Convenient lightweight package
- **Doble QWick Series CHARGES IN LESS THAN TWO HOURS**

Tank Features

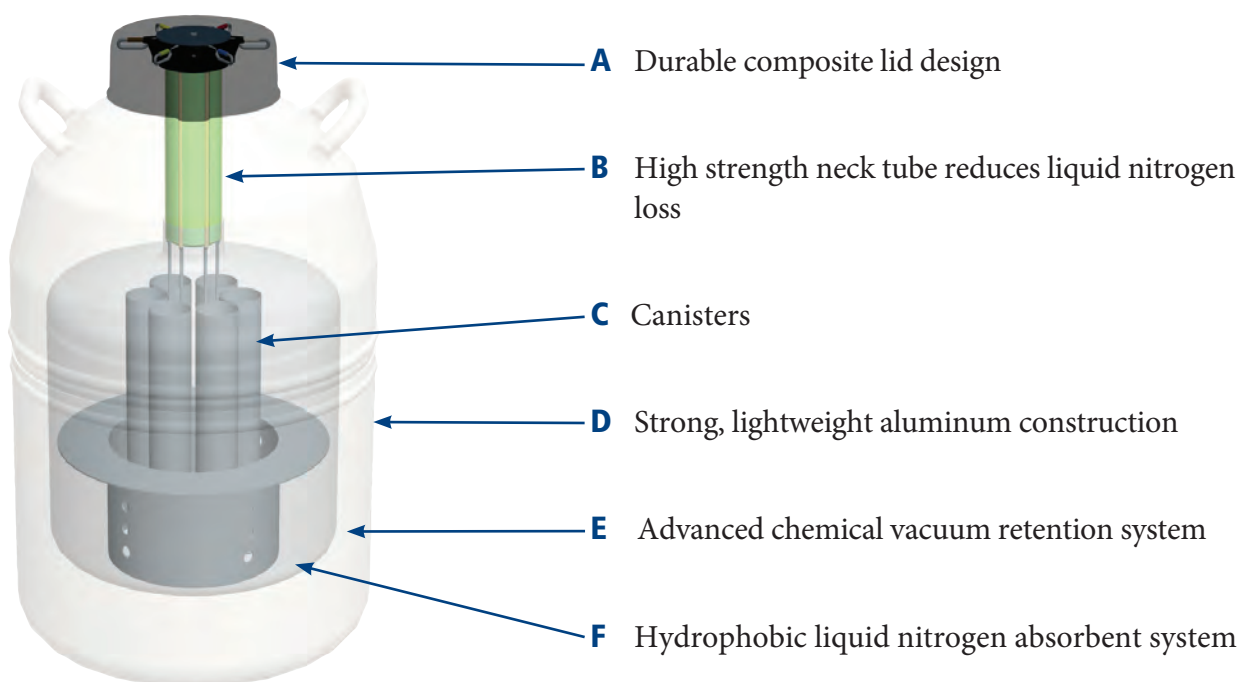

Doble QWick Series	10/660	20/660	17/2400	20/2100	14/4500	14/3500
Normal Working Duration <i>days for liquid</i>	37	116	50	100	74	72
Normal Working Duration <i>days for vapor</i>	10	20	17	20	14	14

Doble Series	Doble 11	Doble 20	Doble 28	Doble 34	Doble 47	Doble 47-10
Normal Working Duration <i>days for liquid</i>	37	116	50	100	74	72
Normal Working Duration <i>days for vapor</i>	17	21	24	30	21	21

Maximum Storage Capacity

Number of Canisters	6	6	6	6	6	10
No. of 1/2 cc Straws <i>10/cane</i>	660	660	2.400	2.100	4.500	3.500
Vial Capacity	210	210	810	630	1.320	1.050

Performance

Liquid Nitrogen Capacity <i>L</i>	10,0	18,5	28,0	32,0	46,0	46,0
Vapor Capacity <i>L</i>	3,1	2,8	8,4	6,7	8,4	9,6
Static Evaporation Rate <i>L/day</i>	0,17	0,10	0,35	0,20	0,40	0,40

Unit Dimensions

Neck Opening <i>in (mm)</i>	2,18 (55)	2,18 (55)	3,81 (97)	3,50 (89)	5,00 (127)	5,00 (127)
Overall Height <i>in (mm)</i>	21,6 (549)	25,7 (652)	22 (559)	26,6 (676)	26,5 (673)	26,5 (673)
Outside Diameter <i>in (mm)</i>	10,2 (260)	14,5 (368)	18,2 (462)	18,2 (462)	20,0 (508)	20,0 (508)
Canister Height <i>in (mm)</i>	11 (279)	11 (279)	11 (279)	11 (279)	11 (279)	11 (279)
Canister Diameter <i>in (mm)</i>	1,65 (41)	1,65 (42)	3,09 (78)	2,81 (72)	4,00 (101)	2,81 (72)
Weight Empty <i>lb. (kg)</i>	17,0 (7,7)	25,2 (11,4)	34,0 (15,4)	39,2 (17,8)	47,0 (21,3)	48,0 (21,8)
Weight Charged <i>vapor lb. (kg)</i>	22,5 (10,2)	30,2 (13,7)	49,0 (22,2)	51,0 (23,1)	63,0 (28,6)	64,0 (29)
Weight Full <i>liquid lb. (kg)</i>	36 (16)	60 (27)	84 (38)	95 (43)	125 (57)	120 (54,5)
Cabosil <i>lb. (kg)</i>	1,0 (0,45)	1,0 (0,45)	3,5 (1,58)	2,0 (0,9)	2,5 (1,2)	3,4 (1,6)

THREE Year Warranty

Conforms to MDD 93/42/EEC, the Medical Device Directive for the EU.

MVE CryoCube



The MVE CryoCube™ provides a cryogenic shipping option for your biological samples. In keeping with MVE tradition, the CryoCube incorporates creative engineering and simplistic design to allow shipping in any orientation without sacrificing temperature or hold time.

Features include:

- Charges in under 1 hour
- Operates as a dry shipper
- -150°C temperature
- 5-day holding time
- Weighs less than 9 lbs. charged
- Safe shipping in any orientation
- Safe for international shipping

CryoCube™

Maximum Storage Capacity

Number of Canisters	1
Number of 1/2 cc Straws 1 Level Bulk	88
Number of 1/4 cc Straws 1 Level Bulk	182
Number of 1.2 & 2.0 ml Vials bulk	6

Performance

LN2 Capacity(min) L	2
Static Holding Time days	5

Unit Dimensions

Neck Opening in. (mm)	1,4 (35)
Overall Height in. (mm)	12 (305)
Outer Width in. (mm)	12 (305)
Inner Canister Height in. (mm)	5,25 (127)
Inner Canister Diameter in. (mm)	1 (35)
Weight Empty lb. (kg)	5,25 (1,8)
Weight Charged lb. (kg)	9 (4)

90 Day Standard Warranty




With the PDF Logger®, you require only one single device and no specific software or cables to monitor temperature during the global transfer of cryobiological goods. The incredibly easy-to-use “Transit” and “Arrived” buttons make initiating and receiving monitored shipments fast and simple. The PDF Logger can be plugged into the USB of any PC to automatically generate a PDF evaluation report including statistics, alarm status, and temperature graph which can be read anywhere without difficulty.

With the 1-year lifespan, there are no more hassles of recalibration and recertification. After the datalogger has been in service for 1 year, simply discard the logger and purchase a new one for about the same cost of recalibration and battery replacement. Your PDF Logger is always under warranty!

Specifications

Dimensions L, W, H in (mm)	3,7 x 1,6 x 0,5 (95 x 40 x 12)
Weight oz (g)	1,4 (40)
Temperature Range	-200°C to +200°C
Accuracy	± 0,5°C [-200°C, -10,1°C]
Resolution	0,1°C
Display	Multifunction LCD, 23,5 x 23,5 mm
Case	ABS plastic
Battery	3,6V
Battery Life	400 days
Sensor	Pt100 3-wire class 0,5
Memory	16,000 data points
Interface	USB – PC Universal Serial Bus
Software Compatibility	Windows 7, VISTA, XP, Win2000, Win 98/ME
Configuration	LIBERO Configuration Utility – Free of charge on www.pdf-logger.com
Evaluation Report	Built-in PDF file generator that automatically establishes an evaluation file including graph. Complies to the ISO Standard 19005-1 Document Management for the long-term preservation of electronic documents

Features Include:

- Displays temperature and alarm status
- Records and stores up to 16,000 data points
- High and Low Alarm Settings
- No recalibrations
- 1 year lifespan – after 1 year, simply discard and purchase new logger
- Battery life remaining days displayed
- No additional software or cables needed!
- Automatically generates PDF /A evaluation report including graph
- CE marked 
- ISO 19005-1
- **Compliant: FDA 21 CFR Part II, GMP, GLP**

1 Year Warranty






By 

Accessories

Item	Image
Transfer Hose	
Tank Switcher	
Liquid Level Alarm	
Level Measuring Tool	
Roller Base	
Protective Shipping Carton	
Manual Discharge Device	
Rigid Dipper Swivel Dipper	

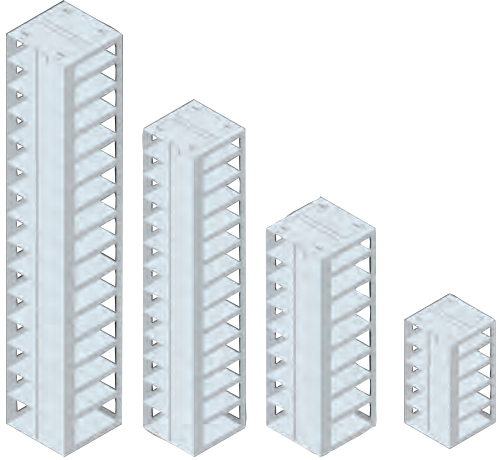
Item	Image
Pouring Spouts	
Vapor Inserts	
Cryo Block 2" Cryo Block 3" Cryo Block 4"	
Cryo Gloves	
Cryo Apron	
LN2 Tx	
MVE Research Dewars	

Inventory

Item	Description/Options	Image																																				
Standard Square Racks with Locking Rods	2" Box Large Racks 3" Box Mini Racks 2" Box Mini Racks 3,75" Box Large Racks 3" Box Large Racks 3,75" Box Mini Racks																																					
Standard Shelf Heights	For 2" Boxes For 3" Boxes For 3.75" Boxes																																					
Square Racks	<table border="0"> <tr> <td>3-3.75 Large</td> <td>9-2 Large</td> </tr> <tr> <td>4-3 Large</td> <td>9-2 Mini</td> </tr> <tr> <td>4-3.75 Large</td> <td>9-3 Large</td> </tr> <tr> <td>5-3 Large</td> <td>9-3 Mini</td> </tr> <tr> <td>5-3 Mini</td> <td>10-2 Large</td> </tr> <tr> <td>5-3.75 Large</td> <td>11-2 Large</td> </tr> <tr> <td>5-3.75 Mini</td> <td>11-2 Mini</td> </tr> <tr> <td>6-2 Large</td> <td>11-3 Large</td> </tr> <tr> <td>6-3 Large</td> <td>11-3 Mini</td> </tr> <tr> <td>6-3.75 Large</td> <td>12-2 Large</td> </tr> <tr> <td>7-2 Large</td> <td>12-2 Mini</td> </tr> <tr> <td>7-2 Mini</td> <td>13-2 Large</td> </tr> <tr> <td>7-3 Large</td> <td>13-2 Mini</td> </tr> <tr> <td>7-3 Mini</td> <td>14-2 Large</td> </tr> <tr> <td>7-3.75 Large</td> <td>12-2 Mini</td> </tr> <tr> <td>8-2 Large</td> <td>15-2 Large</td> </tr> <tr> <td>8-3 Large</td> <td>15-2 Mini</td> </tr> <tr> <td>8-3 Mini</td> <td></td> </tr> </table>	3-3.75 Large	9-2 Large	4-3 Large	9-2 Mini	4-3.75 Large	9-3 Large	5-3 Large	9-3 Mini	5-3 Mini	10-2 Large	5-3.75 Large	11-2 Large	5-3.75 Mini	11-2 Mini	6-2 Large	11-3 Large	6-3 Large	11-3 Mini	6-3.75 Large	12-2 Large	7-2 Large	12-2 Mini	7-2 Mini	13-2 Large	7-3 Large	13-2 Mini	7-3 Mini	14-2 Large	7-3.75 Large	12-2 Mini	8-2 Large	15-2 Large	8-3 Large	15-2 Mini	8-3 Mini		
3-3.75 Large	9-2 Large																																					
4-3 Large	9-2 Mini																																					
4-3.75 Large	9-3 Large																																					
5-3 Large	9-3 Mini																																					
5-3 Mini	10-2 Large																																					
5-3.75 Large	11-2 Large																																					
5-3.75 Mini	11-2 Mini																																					
6-2 Large	11-3 Large																																					
6-3 Large	11-3 Mini																																					
6-3.75 Large	12-2 Large																																					
7-2 Large	12-2 Mini																																					
7-2 Mini	13-2 Large																																					
7-3 Large	13-2 Mini																																					
7-3 Mini	14-2 Large																																					
7-3.75 Large	12-2 Mini																																					
8-2 Large	15-2 Large																																					
8-3 Large	15-2 Mini																																					
8-3 Mini																																						
Plastic Boxes	Large Box—100 Cell (5,25x5,25"; 133x133 mm) Large Clear Box—100 Cell (5,25x5,25"; 133x133 mm) Mini Box—25 Cell (2,65x2,65"; 67x67 mm)																																					
Cardboard Boxes	Large Box—81 Cell (5,25x5,25"; 133x133 mm)																																					
SUC-1 Canisters	Square canister available in one size																																					
Blood Bag Frames & Cassettes	Medsep (791 OS/U) —25 mL 4R9951—50 mL 4R9953—250 mL 4R9955—500 mL DF 200—200 mL DF 700—700 mL																																					

Please reference MVE Freezer Inventory Systems catalog for a complete list of inventory products.

Chart: Total Cryogenic Solutions

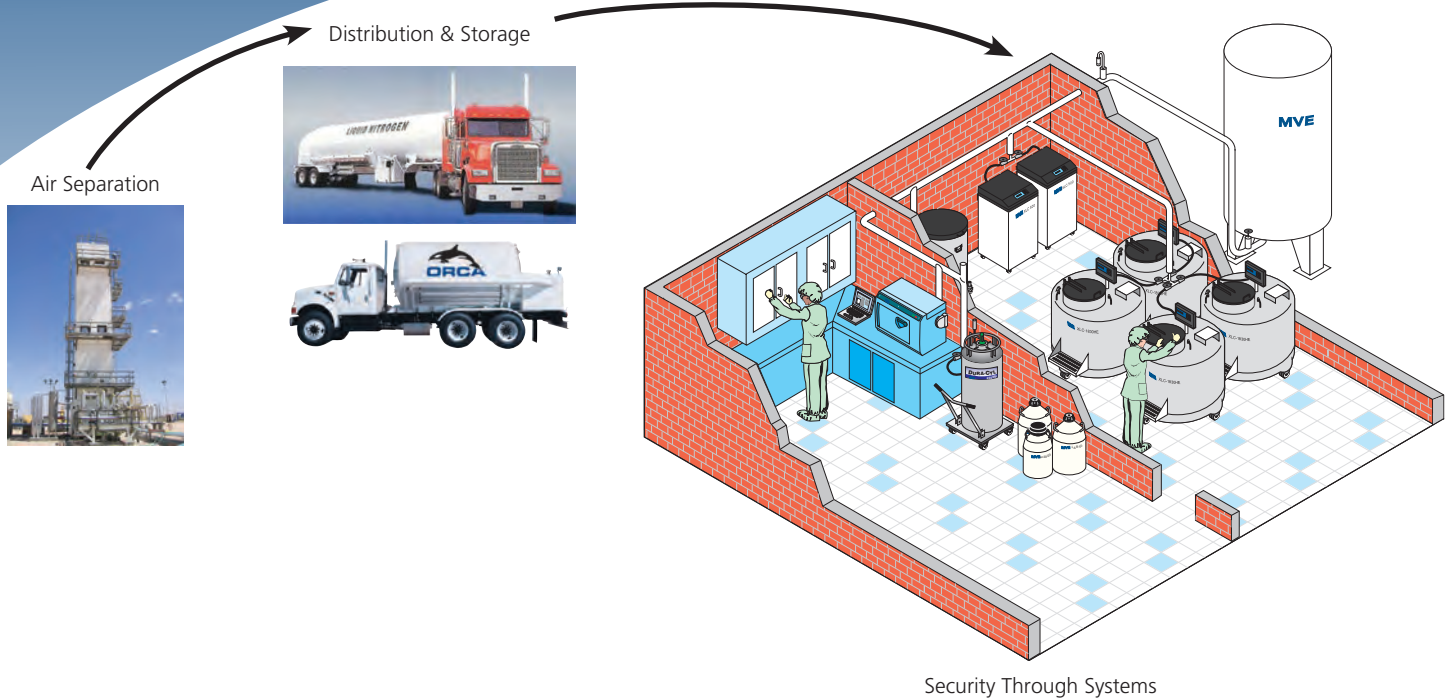

Our Global Presence



Chart BioMedical
 2200 Airport Industrial Dr., Ste. 500
 Ball Ground, GA 30107
 Ph 770-721-7759 • Toll Free 1-800-482-2473
 Fax 770-721-7758
customerservice.usa@chartindustries.com



www.chartbiomed.com

Chart BioMedical Ltd.
 Ph +44(0) 1344 403100 • Fax +44(0) 1344 429224
customerservice.europe@chartindustries.com
 Chart Japan Co., Ltd.
 Ph + (03) 5776 2670 • Fax + (03) 5776 2676
customerservice.japan@chartindustries.com
 Chart Australia Pty Ltd.
 Ph + 61 2 974 94 333 • Fax +61 2 974 94 666
customerservice.australia@chartindustries.com

Chart Inc. reserves the right to discontinue its products, or change the prices, materials, equipment, quality, descriptions, specifications and/or processes to its products at any time without prior notice and with no further obligation or consequence. All rights not expressly stated herein are reserved by us, as applicable.